


Loading a Roll of Paper




1. Open Roll Paper Cover



2. Remove Roll Paper Holder Bar




3. Remove the Left Paper Flange from Bar

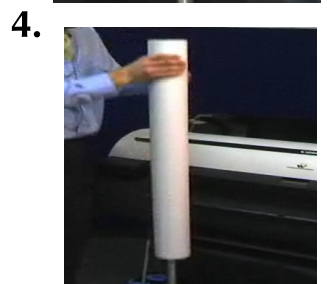


4. Slide Roll of paper onto bar and flush against Bottom (right) Paper Flange



5. Replace Left Paper Flange and lock by pressing down the Blue Lock Tab

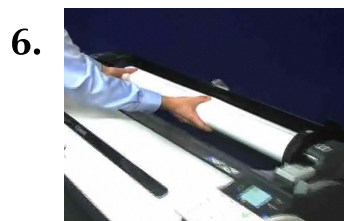

6. Reseat the Paper Holder Bar into the printer making sure the Right Matches R and Left to L

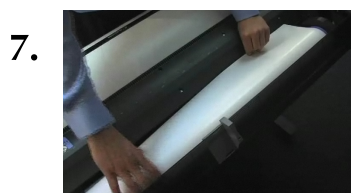

7. Feed leading edge of paper down into the printer about 10 inches until it stops. The printer will click, grabbing the paper and beep



8. Select the paper type you have loaded from list and press OK